


OLH060EN

EN 1765 Heavy Duty Oil and Fuel
S&D Hose, 20 Bar

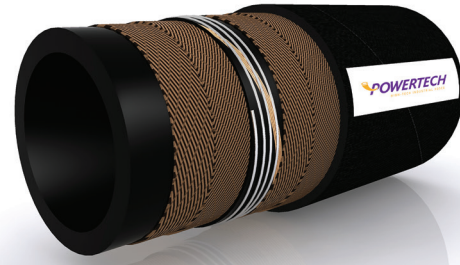

Code	ID (mm)	OD (mm)	Wall (mm)	Working Pressure (bar)	Burst Pressure (bar)	Bending Radius (mm)	Weight (kg/m)	Max. Length (m)
OLH060EN-102x9.5	102	121	9.5	20	60	419	4,46	40
OLH060EN-127x10	127	147	10	20	60	570	5,60	40

Application

Heavy duty suction and discharge hose for transport of mineral oil products and fuel mixtures with aromatic content up to 50%, suitable for offshore applications and constructed in compliance with ABS / DNV standards.

Temperature

-40°C to +100°C

Features

Durable, long lasting, resistant to aromatic content up to 50%, flame retardant and conductive

Type

Mandrel built

Tube

Oil resistant synthetic rubber compound, black, smooth, anti-static, conductive

Reinforcement

High tensile textile cord fabric, steel helix wire, anti-static copper wire

Cover

Blend of synthetic rubber compound, black, anti-static, conductive, smooth with cloth impression, oil, abrasion, weather, seawater and ozone resistant and flame retardant

Standard/Notice

EN ISO 1765

Marking

Embossed or Transfer Label

Standards/Approvals

Comments